

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :
Günter BAUR ET AL. : Group Art Unit: 2871
Serial No.: 08/627,386 : Examiner: PARKER, K
Filed: April 4, 1996 :

#30/appeal
Brief

ELECTROOPTICAL LIQUID CRYSTAL SWITCHING ELEMENT

BRIEF ON APPEAL

I hereby certify that this correspondence is being deposited with the U.S. Postal Services as First Class Mail in an envelope addressed To: Commissioner of Patents and Trademarks, Washington, D.C. 20231 On: 2/21/02
Name: CSABA HENTER
Signature: [Signature]
Date: 2/21/02

Honorable Commissioner of Patents
Washington, D.C. 20231

Sir:

Further to the Notice of Appeal filed on November 21, 2001, herewith are three copies of Appellants' Brief on Appeal. The attached checks include the statutory fee of \$320.00 for the filing of this Brief and the \$110.00 for the extension fee.

This is an appeal from the decision of the Examiner to maintain a rejection of all the claims as unpatentable under the judicially created doctrine of obviousness-type double patenting after a Terminal Disclaimer was filed over a patent over which the terms of the patents in issue have already been disclaimed and for rejecting claims 86 and 87 as indefinite.

(1) REAL PARTY IN INTEREST

The real party in interest in the present application is Merck Patent GmbH, to whom the parent application and all patents issuing therefrom were assigned to on February 6, 1996. The assignment was recorded on March 1, 1996. The parent application is now issued US Patent No. 5,576,867.

(2) RELATED APPEALS AND INTERFERENCES

There are no known related appeals or interferences.

(3) STATUS OF THE CLAIMS

Claims 20-35, 37-85 and 88-124 are pending in the application.

RECEIVED
MAR -8 2002
TC 2800 MAIL ROOM

(4) STATUS OF AMENDMENTS AFTER FINAL

Not applicable - no amendments filed after final other than the attached amendment canceling claims 86 and 87 which are not being appealed at this time.

(5) SUMMARY OF THE INVENTION

Appellants' invention is directed to an Electrooptical Liquid Switching Element based on certain novel orientation features. The switching element has a liquid crystal layer and a reorientation means for reorienting the liquid crystal layer into a current orientation in which the electrooptical switching element has a different light transmission. See specification on page 1, lines 3-7.

(6) ISSUES

The issue outstanding in this application is:

Whether a Terminal Disclaimer filed over a patent over which the terms of patents have already been disclaimed, wherein said patents are the basis of a rejection based on the judicially created doctrine of obviousness-type double patenting, is sufficient to overcome the rejection?

(7) GROUPING OF THE CLAIMS

For the purpose of this appeal, all claims are considered to stand or fall together.

(8) APPELLANTS' ARGUMENTS

All claims were rejected under the judicially created doctrine of obviousness-type double patenting as being unpatentable over all claims of U.S. Patent Number 5,841,498 and over U.S. Patent Number 5,841,499. See Office Action dated May 22, 2001.

The examiner raised double patenting issues with respect to USP 5,841,499 and USP 5,841,498 in the Office Action dated December 19, 2001. Any such rejections have already been rendered moot by the Terminal Disclaimer filed on June 4, 1999. Said Terminal Disclaimer referred explicitly to both U.S. patents.

It is true that the Terminal Disclaimer literally disclaims the term of a patent granted on this application which might extend beyond that of prior Patent 5,576,867. However, as can be seen in the Appendix by the accompanying copies of the front pages of U.S. Patents 5,576,867,


5,841,498, and 5,841,499, the terms of the latter two patents themselves have already been disclaimed with respect to the term of the '867 patent. Consequently, the term of all three already existing patents will be the same as that of '867 and the term of any patent issuing from this application will also be the same as that of '867. All requirements of a satisfactory terminal disclaimer are met.

Reversal of the rejection is therefore respectfully requested.

Conclusion:

All requirements of a satisfactory terminal disclaimer are met. Reversal of the rejection is therefore courteously requested.

Respectfully submitted,



Csaba Henter (Reg. No. P-50,908)
Anthony J. Zelano (Reg. No. 27,969)
Attorney for Applicant(s)

MILLEN, WHITE, ZELANO
& BRANIGAN, P.C.
Arlington Courthouse Plaza 1, Suite 1400
2200 Clarendon Boulevard
Arlington, Virginia 22201
Telephone: (703) 243-6333
Facsimile: (703) 243-6410

Attorney Docket No.: MERCK-1753-D1

Date: February 21, 2002

AJZ/CHpdrK:\Merck\1753 D1\Appeal Brief.doc

APPENDIX

The claims:

20. An electro-optical display device comprising a plurality of liquid crystal switching elements which comprise a liquid crystal layer comprising liquid crystal molecules and having a surface for display of an image which is switched under control of an electric field having a component predominantly parallel to said surface, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 < 30^\circ$, and an orientation angle β_0 , $0^\circ < \beta_0 < 90^\circ$.

21. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 \leq 25^\circ$. ✓

22. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 \leq 20^\circ$. ✓

23. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 \leq 10^\circ$. ✓

24. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 \leq 5^\circ$. ✓

25. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 \leq 3^\circ$. ✓

26. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 \leq 2^\circ$. ✓

27. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 \leq 1^\circ$. ✓

28. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ < \alpha_0 \leq 20^\circ$. ✓

29. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ < \alpha_0 \leq 10^\circ$.

30. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ < \alpha_0 \leq 5^\circ$.

31. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ < \alpha_0 \leq 2^\circ$.

32. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ < \alpha_0 \leq 1^\circ$.

33. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 which is about 5° .

34. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 which is about 1° .

35. The electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein said liquid crystal molecules have a pretilt angle α_0 which is about 0° .

37. An electro-optical display device of claim 20, wherein k_0 is not 45° .

38. An electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein the liquid crystal layer has an untwisted structure in its initial orientation and can be reoriented to a twisted structure by said field component oriented predominantly parallel to the liquid crystal layer.

39. An electro-optical display device of claim 20, 37, 44, 63, 97, 99, 101, 102, 103 or 119, wherein the liquid crystal layer has a twisted structure in its initial orientation which can be untwisted by the field component aligned predominantly parallel to the liquid crystal layer.

40. The electro-optical display device of claim 20, wherein said liquid crystal switching elements further comprise:

- (a) said liquid crystal molecules which are twistable;
- (b) a substrate; and
- (c) an electrode structure which generates said electric field having a component predominantly parallel to the surface of said liquid crystal layer.

41. The electro-optical display device of claim 40, 44 or 119, wherein the initial twist angle β of the liquid crystal molecules is within 15 degrees of 0° , or within 15 degrees of 90° .

42. The electro-optical display device of claim 40, further comprising:

- (d) a polarizer in optical relation with said liquid crystal layer; and
- (e) a voltage source or a current source connected to said electrode structure.

43. The electro-optical display device of claim 40, further comprising:

- (d) a polarizer in optical relation with said liquid crystal layer; and
- (e) a voltage source connected to said electrode structure.

44. An electro-optical display device comprising a plurality of liquid crystal switching elements which comprise a liquid crystal layer comprising liquid crystal molecules and having a surface for display of an image which is switched under control of an electric field having a component predominantly parallel to said surface, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 < 30^\circ$,

wherein said liquid crystal switching elements further comprise:

- (a) said liquid crystal molecules which are twistable;
- (b) a substrate;
- (c) an electrode structure which generates said electric field having a component predominantly parallel to the surface of said liquid crystal layer;
- (d) a polarizer in optical relation with said liquid crystal layer;
- (e) a voltage source connected to said electrode structure; and
- (f) an orientation layer, in contact with at least one surface of said liquid crystal layer, which aligns the liquid crystal molecules in a direction whereby they have an orientation angle β_0 , $0^\circ < \beta_0 < 90^\circ$.

45. The electro-optical display device of claim 44 or 119, comprising an orientation layer, in contact with at least one surface of said liquid crystal layer, which aligns the liquid crystal molecules in a direction whereby they have said pretilt angle α_0 , $0^\circ \leq \alpha_0 < 30^\circ$.

46. The electro-optical display device of claim 20, wherein said liquid crystal layer is nematic.

47. The electro-optical display device of claim 42, further comprising an analyzer in optical relation with said polarizer.

48. The electro-optical display device of claim 20, wherein $\Delta n \cdot d / \lambda$ of the liquid crystal layer is larger than zero but smaller than four.

49. The electro-optical display device of claim 40, wherein the axes of switching-effective twisting of the liquid crystal molecules are substantially perpendicular to the plane of the substrate.

50. The electro-optical display device of claim 40, wherein, within the image spot of the liquid crystal switching element, said electrode structure is formed between the substrate and the liquid crystal layer and has at least one pair of electrodes with a space therebetween.

51. The electro-optical display device of claim 50, wherein each pair of electrodes comprises strip- or line-type electrodes which extend to make a space between said pair of electrodes.

52. The electro-optical display device of claim 51, wherein the electrodes intermesh in comb fashion.

53. The electro-optical display device of claim 50, wherein the space between the pair of electrodes is 2 μm to 50 μm .

54. The electro-optical display device of claim 50, wherein the applied voltage between the pair of electrodes is one volt to 80 volts.

55. The electro-optical display device of claim 40, wherein the thickness of the liquid crystal layer is 1 μm to 10 μm .

56. The electro-optical display device of claim 40, wherein the area of the image spots of the liquid crystal switching elements is 10 μm^2 to 1 mm^2 .

57. The electro-optical display device of claim 40, wherein the plurality of liquid crystal switching elements are arranged in the form of a matrix.

58. The electro-optical display device of claim 57, wherein said matrix is an active matrix.

59. The electro-optical display device of claim 20, wherein the plurality of liquid crystal switching elements are addressed by the time multiplex method.

60. The electro-optical display device of claim 59, wherein the switching elements are used to alter the brightness and/or color of a pixel of the electro-optical display device.

61. The electro-optical display device of claim 58, wherein the active matrix is a transistor matrix.

62. The electro-optical display device of claim 40, wherein the electrode structure is located in one plane.

63. An electro-optical display device comprising a plurality of liquid crystal switching elements which comprise a liquid crystal layer comprising liquid crystal molecules and having a surface for display of an image which is switched under control of an electric field having a component predominantly parallel to said surface, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 < 30^\circ$,

wherein said liquid crystal switching elements further comprise:

- (a) said liquid crystal molecules which are twistable;
- (b) a substrate; and
- (c) an electrode structure which generates said electric field having a component predominantly parallel to the surface of said liquid crystal layer,

wherein the electrode structure is arranged alternately in at least two different planes in parallel with the substrate.

64. The electro-optical display device of claim 63, wherein the electrode structure is located between a substrate and the liquid crystal layer.

65. The electro-optical display device of claim 64, wherein said at least two planes are located between the liquid-crystal layer and a substrate.

66. The electro-optical display device of claim 65, wherein said two planes of the alternating electrodes are formed by the two opposite surfaces of a thin layer.

67. The electro-optical display device of claim 66, wherein said thin layer is an insulating film.

68. The electro-optical display device of claim 40, wherein the liquid-crystal switching elements comprise a multiplicity of pixels.

69. The electro-optical display device of claim 47, wherein the angle between the direction of the initial orientation of the liquid crystal molecules at the surface of the liquid crystal layer on the side of the polarizer and the light transmitting direction of the polarizer is approximately 0° , and the angle between the light transmitting direction of said polarizer and the light transmitting direction of the analyzer is approximately 0° or approximately 90° .

70. The electro-optical display device of claim 47, wherein the angle between the direction of the initial orientation of the liquid crystal molecules at the surface of the liquid crystal layer on the side of the polarizer and the light transmitting direction of the polarizer is approximately 90° , and the angle between the light transmitting direction of said polarizer and the light transmitting direction of the analyzer is approximately 0° or approximately 90° .

71. The electro-optical display device of claim 20 further comprising a polarizer in optical relation with the liquid-crystal layer.

72. The electro-optical display device of claim 71, comprising an analyzer in optical relation with the liquid-crystal layer.

73. The electro-optical display device of claim 20, wherein the liquid crystal layer contains a dichroic dye.

74. The electro-optical display device of claim 20 further comprising a current or voltage source.

75. The electro-optical display device of claim 20 further comprising a voltage source.

76. The electro-optical display device of claim 20 which is driven by a matrix of active switching elements.

77. The electro-optical display device of claim 58, wherein the switching elements of the active matrix are thin-film transistors.

78. The electro-optical display device of claim 20, wherein the switching elements are provided with optical compensation.

79. The electro-optical display device of claim 20, wherein the switching elements comprise a birefringent optical compensator in optical correlation with the liquid-crystal layer.

80. The electro-optical display device of claim 20, wherein said liquid crystal layer comprises a polymer.

81. The electro-optical display device of claim 36, wherein β_0 is not about 40° and not about 50° .

82. The electro-optical display device of claim 20 which is driven by a direct triggering device.

83. The electro-optical display device of claim 20 which is directly driven according to the time multiplex method.

84. An electro-optical display device comprising a liquid crystal layer comprising liquid crystal molecules and having a surface for display of an image which is switched under control of an electric field having a component predominantly parallel to said surface, wherein said liquid crystal molecules are in homogeneous alignment and have a pretilt angle α_0 and an orientation angle β_0 which prevent domain formation in said image and/or which impart to said image a small viewing angle dependence and a correspondingly improved image contrast.

85. An electro-optical display device comprising a liquid crystal layer comprising liquid crystal molecules and having a surface for display of an image which is switched under control of an electric field having a component predominantly parallel to said surface, wherein said liquid crystal molecules are in homogeneous alignment and have a pretilt angle α_0 and an orientation angle β_0 which reduce domain formation in said image and/or which impart to said image a small viewing angle dependence and a correspondingly improved image contrast.

88. An electro-optical display device of claim 85, wherein said α_0 and β_0 values impart to said image a small viewing angle dependence wherein the variation of the degree of light transmission (1-

f_{\min}/f_{\max}) is, over all φ values, below about 0.57 when Θ is up to 45° .

89. An electro-optical display device comprising a liquid crystal layer comprising liquid crystal molecules and having a surface for display of an image which is switched under control of an electric field having a component predominantly parallel to said surface, wherein said liquid crystal molecules are in homogeneous alignment and said device has an initial state configuration in the absence of electric field which during operation reduces domain formation in said image and/or which imparts to said image a small viewing angle dependence and a correspondingly improved image contrast.

90. A liquid crystal switching element comprising a liquid crystal layer comprising liquid crystal molecules and having a surface for display of an image which is switched under control of an electric field having a component predominantly parallel to said surface, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 < 30^\circ$, and an orientation angle β_0 , $0^\circ < \beta_0 < 90^\circ$.

97. An electro-optical device of claim 20, wherein said liquid crystal molecules have an orientation angle β_0 which is not 40° , not 45° and not 50° .

98. An electro-optical device of claim 20, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 50^\circ$ or $\beta_0 < 40^\circ$.

99. An electro-optical device of claim 20, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 55^\circ$ or $\beta_0 < 35^\circ$.

100. An electro-optical device of claim 20, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 60^\circ$ or $\beta_0 < 30^\circ$.

101. An electro-optical device of claim 20, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 65^\circ$ or $\beta_0 < 25^\circ$.

102. An electro-optical device of claim 20, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 70^\circ$ or $\beta_0 < 20^\circ$.

103. An electro-optical device of claim 20, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 75^\circ$ or $\beta_0 < 15^\circ$.

104. An electro-optical device of claim 20, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 80^\circ$ or $\beta_0 < 10^\circ$.

105. An electro-optical display device of claim 20, wherein the liquid crystal layer has an untwisted structure in its initial orientation and can be reoriented to a twisted structure by said field component oriented predominantly parallel to the liquid crystal layer.

106. An electro-optical display device of claim 22, wherein the liquid crystal layer has an untwisted structure in its initial orientation and can be reoriented to a twisted structure by said field component oriented predominantly parallel to the liquid crystal layer.

107. An electro-optical display device of claim 24, wherein the liquid crystal layer has an untwisted structure in its initial orientation and can be reoriented to a twisted structure by said field component oriented predominantly parallel to the liquid crystal layer.

108. An electro-optical display device of claim 27, wherein the liquid crystal layer has an untwisted structure in its initial orientation and can be reoriented to a twisted structure by said field component oriented predominantly parallel to the liquid crystal layer.

109. An electro-optical display device of claim 28, wherein the liquid crystal layer has an untwisted structure in its initial orientation and can be reoriented to a twisted structure by said field component oriented predominantly parallel to the liquid crystal layer.

110. An electro-optical display device of claim 30, wherein the liquid crystal layer has an untwisted structure in its initial orientation and can be reoriented to a twisted structure by said field component oriented predominantly parallel to the liquid crystal layer.

111. An electro-optical display device of claim 32, wherein the liquid crystal layer has an untwisted structure in its initial orientation and can be reoriented to a twisted structure by said field component oriented predominantly parallel to the liquid crystal layer.

112. An electro-optical display device of claim 20, wherein the liquid crystal layer has a twisted structure in its initial orientation which can be untwisted by the field component aligned predominantly parallel to the liquid crystal layer.

113. An electro-optical display device of claim 22, wherein the liquid crystal layer has a twisted structure in its initial orientation which can be untwisted by the field component aligned predominantly parallel to the liquid crystal layer.

114. An electro-optical display device of claim 24, wherein the liquid crystal layer has a twisted structure in its initial orientation which can be untwisted by the field component aligned predominantly parallel to the liquid crystal layer.

115. An electro-optical display device of claim 27, wherein the liquid crystal layer has a twisted structure in its initial orientation which can be untwisted by the field component aligned predominantly parallel to the liquid crystal layer.

116. An electro-optical display device of claim 28, wherein the liquid crystal layer has a twisted structure in its initial orientation which can be untwisted by the field component aligned predominantly parallel to the liquid crystal layer.

117. An electro-optical display device of claim 30, wherein the liquid crystal layer has a twisted structure in its initial orientation which can be untwisted by the field component aligned predominantly parallel to the liquid crystal layer.

118. An electro-optical display device of claim 32, wherein the liquid crystal layer has a twisted structure in its initial orientation which can be untwisted by the field component aligned predominantly parallel to the liquid crystal layer.

119. An electro-optical display device comprising a plurality of liquid crystal switching elements which comprise a liquid crystal layer comprising liquid crystal molecules and having a surface for display of an image which is switched under control of an electric field having a

component predominantly parallel to said surface, wherein said liquid crystal molecules have a pretilt angle α_0 , $0^\circ \leq \alpha_0 < 30^\circ$,

wherein said liquid crystal switching elements further comprise:

- (a) said liquid crystal molecules which are twistable;

- (b) a substrate;
- (c) an electrode structure which generates said electric field having a component predominantly parallel to the surface of said liquid crystal layer;
- (d) a polarizer in optical relation with said liquid crystal layer;
- (e) a voltage source or a current source connected to said electrode structure; and
- (f) an orientation layer, in contact with at least one surface of said liquid crystal layer, which aligns the liquid crystal molecules in a direction whereby they have an orientation angle β_0 , $0^\circ < \beta_0 < 90^\circ$.

120. An electro-optical device of claim 44, 63 or 119, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 50^\circ$ or $\beta_0 < 40^\circ$.

121. An electro-optical device of claim 44, 63 or 119, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 60^\circ$ or $\beta_0 < 30^\circ$.

122. An electro-optical device of claim 44, 63 or 119, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 65^\circ$ or $\beta_0 < 25^\circ$.

123. An electro-optical device of claim 44, 63 or 119, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 70^\circ$ or $\beta_0 < 20^\circ$.

124. An electro-optical device of claim 44, 63 or 119, wherein said liquid crystal molecules have an orientation angle $\beta_0 > 75^\circ$ or $\beta_0 < 15^\circ$.



US005841499A

United States Patent [19]**Baur et al.**[11] **Patent Number:** **5,841,499**[45] **Date of Patent:** ***Nov. 24, 1998**[54] **REFLECTION MODE LIQUID CRYSTAL DISPLAY DEVICES HAVING A PARALLEL ELECTRIC FIELD AND α_0 WHICH IS $\leq 30^\circ$** [75] **Inventors:** **Günter Baur**, Freiburg; **Waltraud Fehrenbach**, München; **Barbara W. Ne Staudacher**, Ettenheim; **Friedrich Windscheid**, Freiburg-Tiengen; **Rudolf Kiefer**, Vorstetten, all of Germany[73] **Assignee:** **Merck Patent Gesellschaft Mit Beschränkter Haftung**, Darmstadt, Germany[*] **Notice:** The term of this patent shall not extend beyond the expiration date of Pat. No. 5,576,867.[21] **Appl. No.:** **627,388**[22] **Filed:** **Apr. 4, 1996****Related U.S. Application Data**

[62] Division of Ser. No. 466,068, Jun. 6, 1995, Pat. No. 5,576,867, which is a continuation of Ser. No. 363,968, Dec. 23, 1994, abandoned, which is a continuation of Ser. No. 877,187, Aug. 6, 1992, abandoned.

[30] **Foreign Application Priority Data**

Jan. 9, 1990 [DE] Germany 40 00 451.1

[51] **Int. Cl.⁶** **G02F 1/1343; G02F 1/1337; G02F 1/141**[52] **U.S. Cl.** **349/141; 349/33; 349/179; 349/136**[58] **Field of Search** **349/68, 67, 87, 349/123, 19, 138, 39, 42, 136, 141**[56] **References Cited****U.S. PATENT DOCUMENTS**

3,674,342 7/1972 Castellano et al. .
 3,736,047 5/1973 Gelber et al. .
 3,774,989 11/1973 Takahashi .
 3,807,832 4/1974 Soref .

3,834,794 9/1974 Soref .
 3,854,751 12/1974 Haas et al. .
 4,116,544 9/1978 Soref .
 4,345,249 8/1982 Togashi .
 4,844,569 7/1989 Wada et al. .

FOREIGN PATENT DOCUMENTS

23 28 581 1/1974 Germany .
 24 59 533 7/1975 Germany .
 3031 126 4/1982 Germany .
 227 542 9/1985 Germany .
 227 809 9/1985 Germany .

(List continued on next page.)

OTHER PUBLICATIONS

Werner, K., "The best of '96, Second Annual Display of the Year Awards," Information Display, vol. 12, pp. 12-15 (1996).

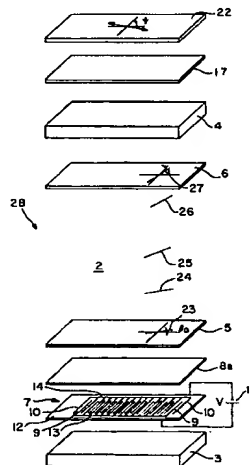
Ohta, M. et al., "Electric Field Analysis in TFT-LCDs With In-Plane Switching Mode of Nematic LCs," Euro Display '96, (6th IDRC of SID), pp. 49-52 (Presentation 5.1 & Conference Digest)(1996).

Tajima, Z. et al., "Hitachi Super TFT-LCD Offers 140° Viewing Angle," Nikkei Electronics Asia, March (1996), pp. 73-76.

(List continued on next page.)

Primary Examiner—William L. Sikes*Assistant Examiner*—Kenneth Parker*Attorney, Agent, or Firm*—Millen, White, Zelano, & Branigan, P.C.[57] **ABSTRACT**

An electro-optical display device comprising a liquid crystal layer achieves switching using an electric field component which is predominantly parallel to the surface of the liquid crystal layer. Low dependence of image contrast on viewing angle is achieved by selection of parameters including pretilt angle α_0 , orientation angle β_0 , etc. of the liquid crystal molecules in the layer. Reflection mode devices are described.

90 Claims, 8 Drawing Sheets



US005841498A

United States Patent [19]

Baur et al.

[11] **Patent Number:** **5,841,498**[45] **Date of Patent:** ***Nov. 24, 1998**

- [54] **LIQUID CRYSTAL DISPLAY DEVICES HAVING A PARALLEL ELECTRIC FIELD AND β_0 , WHICH IS NOT 0 DEGREES OR 90 DEGREES**

4,844,569 7/1989 Wada et al. 350/347

FOREIGN PATENT DOCUMENTS

- [75] **Inventors:** **Günter Baur, Freiburg; Waltraud Fehrenbach, München; Barbara Weber Ne Staudacher, Ettenheim; Friedrich Windscheid, Freiburg-Tiengen; Rudolf Kiefer, Vorstetten, all of Germany**

3031 126	4/1982	Germany .
227 542	9/1985	Germany .
227 809	9/1985	Germany .
53-48542	5/1978	Japan .
53-77646	7/1978	Japan .
53-89753	8/1978	Japan .
54-12762	1/1979	Japan .
54-36752	3/1979	Japan .
54-42163	4/1979	Japan .
54-43047	4/1979	Japan .
54-43048	4/1979	Japan .
54-153047	12/1979	Japan .
55-60918	5/1980	Japan .
56-88179	7/1981	Japan .
56-128988	10/1981	Japan .
58-2872	1/1983	Japan .
60-217336	10/1985	Japan .
60-218624	11/1985	Japan .

- [73] **Assignee:** **Merck Patent Gesellschaft Mit Beschränkter Haftung, Darmstadt, Germany**

- [*] **Notice:** The term of this patent shall not extend beyond the expiration date of Pat. No. 5,576,867.

- [21] **Appl. No.:** **627,387**

- [22] **Filed:** **Apr. 4, 1996**

Related U.S. Application Data

- [62] Division of Ser. No. 466,068, Jun. 6, 1995, Pat. No. 5,576,867, which is a continuation of Ser. No. 363,968, Dec. 23, 1994, abandoned, which is a continuation of Ser. No. 877,187, filed as PCT/EP91/00022, Aug. 6, 1992, abandoned.

- [30] **Foreign Application Priority Data**

Jan. 9, 1990 [DE] Germany 40 00 451.1

- [51] **Int. Cl.⁶** **G02F 1/1343; G02F 1/1337; G02F 1/1141**

- [52] **U.S. Cl.** **349/141; 349/33; 349/136; 349/179**

- [58] **Field of Search** **359/68, 67, 87; 349/123, 19, 138, 39, 42, 136, 141, 33, 143, 179**

- [56] **References Cited**

U.S. PATENT DOCUMENTS

3,774,989 11/1973 Takahashi .

OTHER PUBLICATIONS

Werner, K., "The best of '96, Second Annual Display of the Year Awards," Information Display, vol. 12, pp. 12-15 (1996).

Ohta, M. et al., "Electric Field Analysis in TFT-LCDs With In-Plane Switching Mode of Nematic LCs," Euro Display '96, (6th IDRC of SID), pp. 49-52 (Presentation 5.1 & Conference Digest)(1996).

(List continued on next page.)

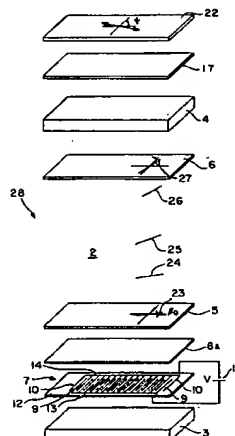
Primary Examiner—William L. Sikes

Assistant Examiner—Kenneth Parker

Attorney, Agent, or Firm—Millen, White, Zelane & Branigan, P.C.

- [57] **ABSTRACT**

An electro-optical display device comprising a liquid crystal layer achieves switching using an electric field component which is predominantly parallel to the surface of the liquid crystal layer. Low dependence of image contrast on viewing angle is achieved by selection of parameters including orientation angle β_0 , and others, of the liquid crystal molecules in the layer.

102 Claims, 8 Drawing Sheets



US005576867A

United States Patent [19]

Baur et al.

[11] **Patent Number:** 5,576,867[45] **Date of Patent:** Nov. 19, 1996

[54] **LIQUID CRYSTAL SWITCHING ELEMENTS HAVING A PARALLEL ELECTRIC FIELD AND β_0 WHICH IS NOT 0° OR 90°**

[75] **Inventors:** Günter Baur, Freiburg; Waltraud Fehrenbach, München; Barbara Weber nee Staudacher, Münchgrund; Friedrich Windscheid, Freiburg-Tiengen; Rudolf Kiefer, Vorstetten, all of Germany

[73] **Assignee:** Merck Patent Gesellschaft mit beschränkter Haftung, Darmstadt, Germany

[21] **Appl. No.:** 466,068

[22] **Filed:** Jun. 6, 1995

Related U.S. Application Data

[63] Continuation of Ser. No. 363,968, Dec. 23, 1994, abandoned, which is a continuation of Ser. No. 877,187, Aug. 6, 1992, abandoned.

Foreign Application Priority Data

Jan. 9, 1990 [DE] Germany 40 00 451.1
Jan. 9, 1990 [WO] WIPO PCT/EP91/00022

[51] **Int. Cl.⁶** G02F 1/1343; G02F 1/1337; G02F 1/141

[52] **U.S. Cl.** 359/87; 359/89; 359/78

[58] **Field of Search** 359/87, 89, 71, 359/73; 78

References Cited**U.S. PATENT DOCUMENTS**

3,674,342	7/1972	Castellano et al.	350/160 R
3,736,047	5/1973	Gelber et al.	359/71
3,807,831	4/1974	Soref	350/150
3,834,794	9/1974	Soref	350/160
3,854,751	12/1974	Haas et al.	350/160
4,039,252	8/1977	Mizuno et al.	359/102
4,116,544	9/1978	Soref	350/336
4,345,249	8/1982	Togashi	340/784

4,844,569 7/1989 Wada et al. 359/53

FOREIGN PATENT DOCUMENTS

2328581	1/1974	Germany .	
2459533	7/1975	Germany .	
54-43048	4/1979	Japan	359/87
1506570	4/1978	United Kingdom .	
84/04601	11/1984	WIPO .	

OTHER PUBLICATIONS

Patent Abstracts of Japan, vol. 13, No. 242, P-880 (Jun. 7, 1989), 1-44422.

Patent Abstracts of Japan, vol. 13, No. 428, P-936 (Sep. 25, 1989), 1-161217.

Patent Abstracts of Japan, vol. 13, No. 460, P-946 (Oct. 18, 1989), 1-179912.

Patent Abstracts of Japan, vol. 13, No. 219, P-875 (May 23, 1989), 1-33521.

Patent Abstracts of Japan, vol. 3, No. 38, E-101 (Mar. 30, 1979) 54-17756.

Norris, "EID '95: International Giants and Local Flair", Information Display, vol. 12, No. 3, Mar. 1996, pp. 24-25 and 26.

(List continued on next page.)

Primary Examiner—William L. Sikes

Assistant Examiner—Ron Trice

Attorney, Agent, or Firm—Millen, White, Zelane, & Branigan, P.C.

ABSTRACT

An electro-optical display device comprising a liquid crystal layer achieves switching using an electric field component which is predominantly parallel to the surface of the liquid crystal layer. Low dependence of image contrast on viewing angle is achieved by selection of parameters including orientation angle β_0 and pretilt angle α_0 of the liquid crystal molecules in the layer. For example, good results are achieved when $0^\circ < \beta_0 \leq 20^\circ$ for liquid crystal molecules having negative dielectric anisotropy and $70^\circ \leq \beta_0 < 90^\circ$ for molecules having positive dielectric anisotropy. Preferably, $0^\circ \leq \alpha_0 < 30^\circ$.

127 Claims, 8 Drawing Sheets

